



HE-1400 RoHS

Harsh Environment LCD Controller

The HE range of COTS controllers are designed to aid in compliance of the strict standards required for Harsh Environment applications. Featuring wide-tolerance power supplies ($\pm 25\%$), low mass tantalum capacitors for maximum vibration and shock tolerance, conformal coating, laboratory certified*** operating temperature range from -40°C to $+80^{\circ}\text{C}$, plus calculated MTBF in excess of 200K hours.

The HE-1400 is a small footprint, highly integrated controller with both DVI and ARGB inputs. Capable of supporting 4:3 format panels at up to SXGA and 16:9 panels up to WXGA, the HE-1400 provides support for both LVDS and TTL panels.

PANEL CONNECTIVITY

TFT :	1366x768	1024x768	640x480
	1280x1024	1024x600	480x234
	1280x800	800x600	
	1280x768	800x480	

INPUT


Analog RGB:	60Hz at SXGA, WXGA, XGA, SVGA, VGA
DVI-D:	60Hz at SXGA, WXGA, XGA, SVGA, VGA
	With auto detect of Digital Separate Sync, Sync-On-Green & Composite Sync. Auto detects VGA-SXGA, interlaced & non-interlaced.

RELIABILITY

Calculated Mean Time Between Failures
In excess of 200,000 hours. Warranty - 3 years.


FEATURES

Colors :	Up to 8-bit per color, 16.7 million colors.
Functions :	On Screen Display (OSD) menu.
Function Controls :	External buttons, Serial Port Control.
Image Scaling :	Up scaling to fit input to panel resolution.
Image Control :	Brightness, Contrast, RGB adjust, Color Temperature
Other Features :	OSD Position, OSD Timeout, Factory Reset, Input Source Select
Dimensions :	107mm x 92mm (4.2" x 3.60")
Form Factor :	DV standard & mounting holes.
Power Requirements :	+12VDC $\pm 25\%$, 4w (controller only)
Panel Power :	Supports 3.3V, 5V, 12V panels.
Panel Signal :	TTL & LVDS.
Inverter Support :	DPMS, Analog Brightness control via serial port
Plug & Play:	DDC 1,2/b compatible
Status Indicator :	Dual color LED support.
Operating Temperature:	-40°C to $+80^{\circ}\text{C}^{**}$
Storage Temperature:	-40°C to 85°C
Coating:	Silicone resin conformal coating. (MOD) DEF-STAN 59/47 Issue 4 & UL QMJU2 compliant

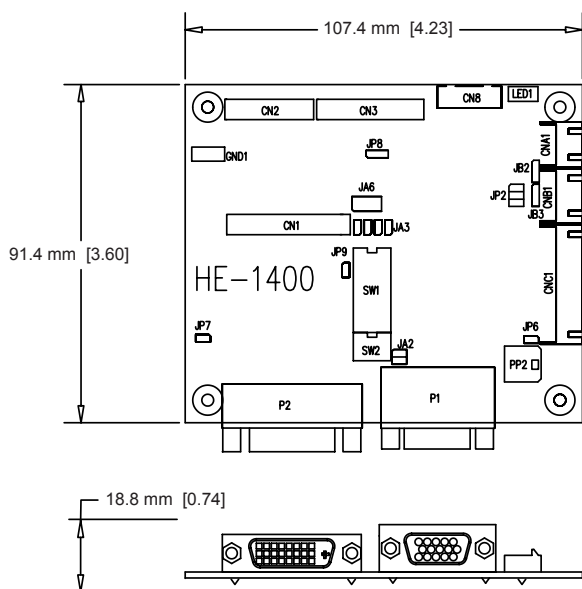

CONNECTOR DEFINITIONS

CN1	LVDS panel signal
CN2	TTL panel signal
CN7	Audio Board Connector
CN3	TTL Panel Signal
CN8	Serial Control
CNA1	Auxiliary power output
CNB1	Backlight inverter
CNC1	OSD Function controls
LED1	Dual color LED connector for controller status
P1	ARGB signal input
P2	DVI-D signal input
PP2	Main Input Power ##



Ready-made 3D drawing files

File Type: SLDprt Save time and effort for your system volumetric analysis design. Includes jpg file previews. <http://www.digitalview.com/controllers/products.php>

** Available upon request.

*** Laboratory certification report available at <http://www.digitalview.com/controllers/support.php>

Overall suitability for usage in critical applications must be independently tested and verified by the user.

ACCESSORIES

Kit 60110-3:	OSD Digital Button Board Kit
Kit 60121-3:	OSD Vertical Membrane Kit
Kit 60125-3:	OSD Horizontal Membrane Kit
416040010-3:	Inverter Interface board
426013800-3:	Power-Input Cable ##
559000104-3:	IR remote control
426090200-3:	RS-232 cable

AVAILABLE DOCUMENTATION

- [Instruction Manual](#)
- [Revision control documentation**](#)
- [Mechanical Drawings](#)
- [Firmware Upgrade Manual**](#)
- [MTBF Analysis**](#)
- [Certified Laboratory test results](#)

CUSTOM ENGINEERING SERVICES

Digital View offers a wide range of customization for OEM customers. Services range from unique part number and configuration control, custom layouts and features.

Digital View offers managed product lifecycles with extended product lifetime options and EOL planning. US manufacturing is available on all Digital View products.

USA

Digital View Inc.

18440 Technology Drive
Morgan Hill, CA 95037
USA

Tel : +1 (408) 782-7773
Fax: +1 (408) 782-7883

EUROPE

Digital View Limited

6 Marylebone Passage
London, W1W 8EX
UK

Tel : +44 (0) 20-7631-2150
Fax: +44 (0) 20-7631-2156

ASIA

Digital View Ltd.

16th Floor Millennium City 3
370 Kwun Tong Road
Kwun Tong, Hong Kong

Tel : (852) 2861-3615
Fax: (852) 2520-2987